


# Kluskens Polyurethane Material

This material is a micro-cellular, rigid, foam polyurethane product supplied with or without a polishing agent within its structure. It can be used with slurries of abrasives and polishing materials for polishing ophthalmic lenses, precision lenses and any other glass or ceramic surface. In addition, this material can be used in the fine finishing of memory discs, magnetic recording heads, precision rings and seals, silicon wafers and quartz crystals.

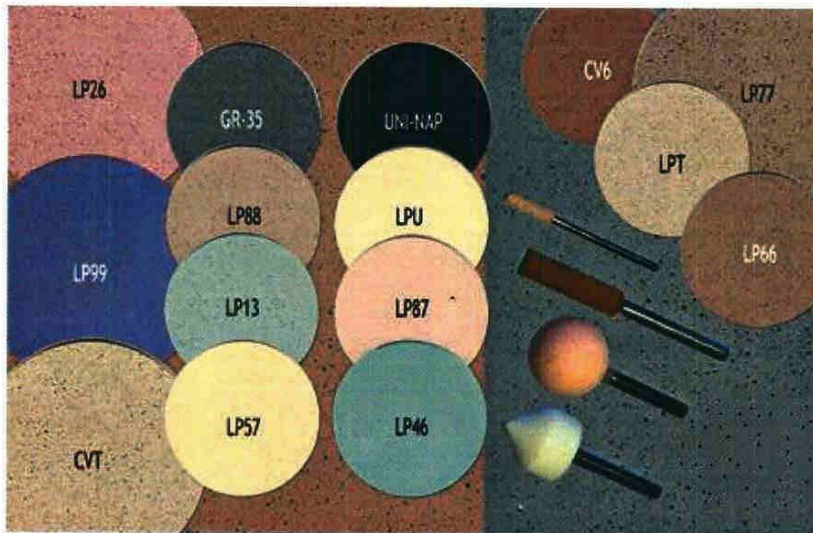

PRODUCT/ GRADE	FILLER	DENSITY LBS. PER CU.FT	HARDNESS		
			SHORE "A" RANGE	DUROMETER AIM	SHORE "D" RANGE
LP-13	Cerium Oxide	21-25 lbs.	53-65	16	13-19
LP-26	Zirconium Oxide	34-42 lbs.	85-93	35-40	33-43
LP-46	Zirconium Oxide	20-30 lbs.	67-82	25	20-30
LP-57	Unfilled	30-40 lbs.	81-91	35	30-40
LP-66	Cerium Oxide	22-32 lbs.	67-82	25	20-30
LP-77	Cerium Oxide	22-32 lbs.	70-88	25	22-37
LP-87	Unfilled	46-53 lbs.	94-97	47	45-50
LP-88	Cerium Oxide	65-75 lbs.	-----	65	60-67
GR-25	Unfilled	25-30 lbs.	75-85	25-30	25-33
GR-35	Zirconium Oxide	34-42 lbs.	85-93	35-40	33-43

Burning Rate – Self Extinguishing when stored flat.  
 Supplied without adhesive.  
 Also available with adhesive at a surcharge.

Polyurethane