




## **ALUMINUM OXIDE POLISHING SLURRY**

## **Typical Physical Properties**

- Appearance ...... white slurry
- Particle Size(coulter) D50......1.2 – 2.2μm
- Baumé......N/A
- Suspension Treated......Yes

## **Applications**

- Precision Engineered for Polishing a Wide Variety of Polymeric Ophthalmic Substrates
- Exceptional Surface Quality on All CR-39, High Index, and Polycarbonate Surfaces
- Aggressive Use in Polycarbonate Dedicated Systems
- Slurry is Designed to be Diluted (at Customer's Site) to Baumé of 12 – 30

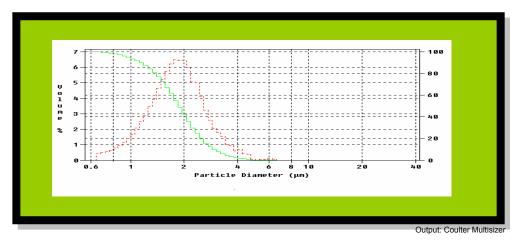

Packaging ......(G) 4 gal/case; 144 gal/pallet
(P) 5 gal/pail; 24 pails/pallet

Cautions ..... Refer to Material Safety Data Sheet

295 Fifth Avenue New York, NY 10016 | Tel: 212 685 570 | Fax: 212 685 5719 |

mail@gkci.com www.gkci.com

The information herein is considered to be a fair representation of this product. The data are not to be interpreted as a specification or guarantee of properties. Gerard Kluyskens Company and Ferro Corporation make no implied warranties as to its accuracy and assumes no liability arising out of its use by others. The information does not constitute a license to use or infringe any patents.